



## MOTOR GOLD Multigrade Hypoid Geartec GL5 SAE 75W-90

**MOTOR GOLD Multigrade Hypoid Geartec GL5 SAE 75W-90** is based on a very shear stable VI-improver which assures the desired SAE class even under extreme load for a long time. Due to the excellent viscosity temperature behaviour, these products can be used all the year round in the vehicle fleet.


**MOTOR GOLD Multigrade Hypoid Geartec GL5 SAE 75W-90** was developed for highly loaded hypoid gear boxes and manual transmissions.

**ACEA-/API-specifications:**  
API GL 5

### Technical characteristics MOTOR GOLD Multigrade Hypoid Geartec GL5 SAE 75W-90:

Parameter	Testing Methods	Units	
Density 15 °C	DIN EN ISO 12185	g/cm <sup>3</sup>	0.880
Kin. Viscosity @ 40 °C	DIN 51562 -1	mm <sup>2</sup> /s	95.0
Kin. Viscosity @ 100 °C	DIN 51562-1	mm <sup>2</sup> /s	16.1
Viscosity Index	DIN ISO 2909		182
Flash Point	DIN ISO 2592	°C	> 200
Pour Point	DIN ISO 3016	°C	-42
Brookfield @ -40 °C	ASTM D 2983	mPa*s	< 150,000

The given data are typical data. Please observe operating prescriptions.

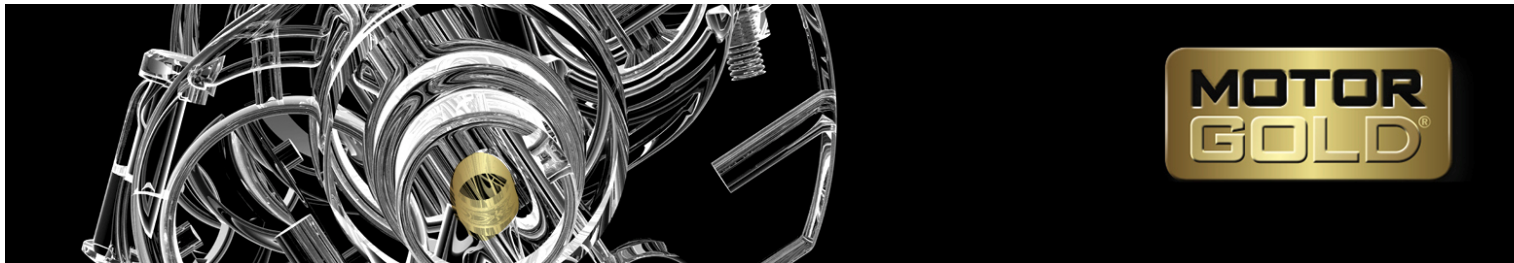

**Available packaging:**

	965 Liter	208 Liter	60 Liter	20 Liter	4 * 5 Liter	12 * 1 Liter	Notes:
MOTOR GOLD Multigrade Hypoid Geartec GL5 SAE 75W-90		•		•			

<sup>1</sup> Version 3 - 04/2017

<sup>1</sup> This data sheet and the information it contains is believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is based on standard tests under laboratory conditions and is given as a guide only. Users are advised to ensure that they refer to the latest version of this data sheet. It is the responsibility of the user to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe handling, and disposal of the product. No responsibility is taken by either AVISTA OIL Group or its subsidiaries for any damage or injury resulting from abnormal use of the material, from any failure to adhere to recommendations, or from hazards inherent in the nature of the material. All products, services and information supplied are provided under our standard conditions of sale.